



CENTRIFUGALNI VENTILATORI (DUVALJKE) ZA PEĆI I KOTLOVE



RADNO KOLO SA UNAZAD ZAKRIVLJENIM LOPATICAMA

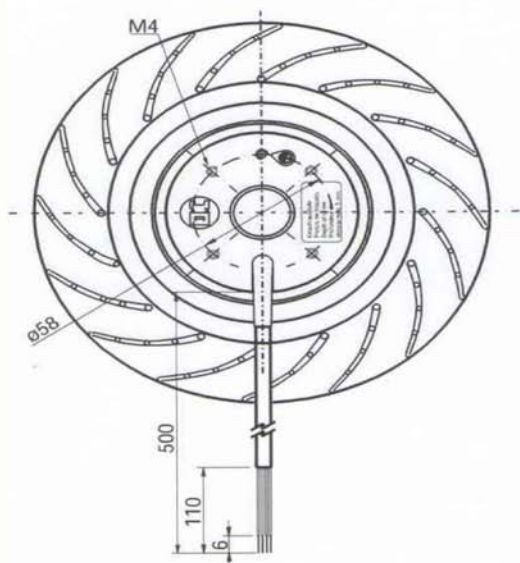

DIMENSIONS (mm)

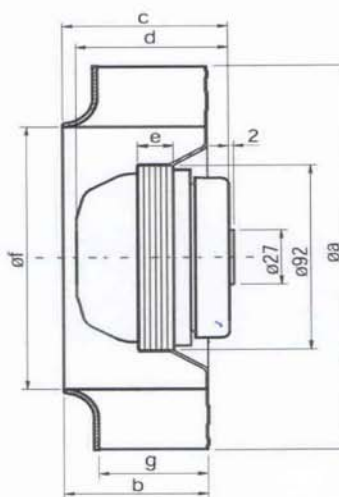


Tipo / Type	a	b	c	d	e	f	g
RB2C-133/060 K010 I	133	60	85	63	15	90	44
RB2C-175/047 K015 I	175	47	59	63	15	131	32
RB2C-175/060 K015 I	175	60	71	63	15	131	45
RB2C-180/077 K010 I	180	77	83	63	15	131	62
RB2C-190/060 K010 I	190	60	68	63	15	131	46
RB2C-220/063 K256 I	220	63	71	65	15	159	47
RB2C-220/063 K132 I	220	63	71	73	25	159	47

A descarga libre con boca de aspiración sin voluta.
Free blowing with inlet ring without scroll.

Tipo / Type	N° CURVA N. CURVE	TENSION VOLTAGE	FRECUENCIA FREQUENCY	CONDENSADOR CAPACITOR	POTENCIA INPUT	INTENSIDAD CURRENT	CAUDAL AIR VOLUME	VELOCIDAD SPEED	NIVEL RUIDO NOISE LEVEL	MAX. AMBIENT. TEMPERATURE	GIRO ROTATION	PESO WEIGHT
		V	Hz	μF	W	A	m³/h	RPM	dBA	°C	CW/CCW	Kg
RB2C-133/060 K010 I	1	230	50 60	1 1	25 30	0,22 0,19	200 250	2870 3400	60 63	75 95	CCW	1,6
RB2C-175/047 K015 I	2	230	50 60	2,5 2	60 65	0,27 0,30	425 460	2500 2600	66 68	65 75	CCW	1,5
RB2C-175/060 K015 I	3	230	50 60	2 2	60 75	0,28 0,34	480 525	2535 2700	70 65	70 65	CCW	1,5
RB2C-180/077 K010 I	4	230	50 60	2 2	80 95	0,37 0,42	560 570	2200 2250	61 62	60 35	CCW	1,5
RB2C-190/060 K010 I	5	230	50 60	2 2	65 90	0,30 0,40	600 625	2500 2600	71 72	75 60	CCW	1,3
RB2C-220/063 K256 I	6	230	50 60	2,5 2,5	75 100	0,34 0,43	785 900	2530 2800	70 72	55 50	CCW	1,4
RB2C-220/063 K132 I	7	230	50 60	2 2	85 115	0,43 0,50	880 950	2700 3050	72 75	65 40	CCW	1,8

RADNO KOLO SA UNAPRED ZAKRIVLJENIM LOPATICMA

DIMENSIONS (mm)

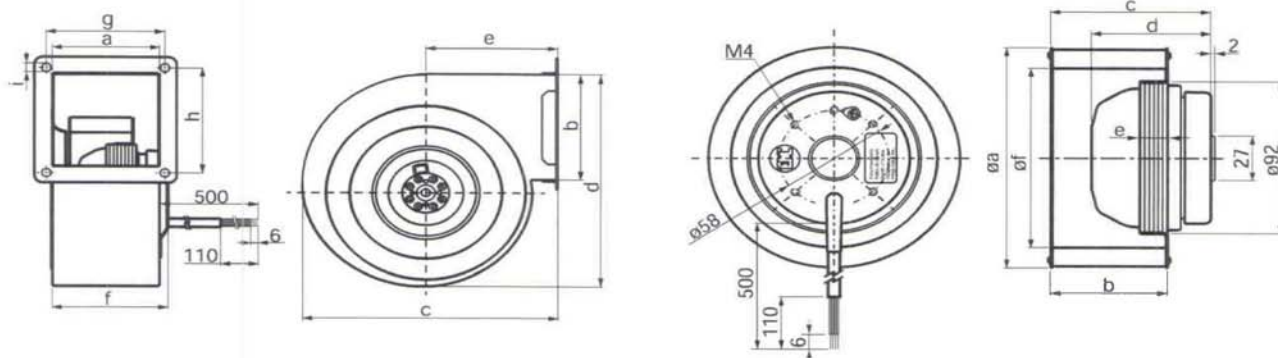

Con voluta / With scroll

Tipo / Type	a	b	c	d	e	f	g	h	i
RF2C-120/062 K010 SF	78	69	175	181	88	99	94	82	6
RF2C-133/042 K010 SF	63	69	175	181	88	82	94	82	6
RF2C-133/046 K010 SF	63	69	175	181	88	82	94	82	6
RF2C-133/062 K010 SF	77	69	175	181	88	99	94	82	6
RF2C-140/059 K172 SF	98	94	224	244	103	98	115	105	7

Motoventilador / Motorized impeller

Tipo / Type	a	b	c	d	e	f
RF2C-120/062 K010 I	120	62	84	63	15	96
RF2C-133/042 K010 I	133	42	68	63	15	108
RF2C-133/046 K010 I	133	46	68	63	15	108
RF2C-133/062 K010 I	133	62	84	63	15	108
RF2C-140/059 K172 I	140	59	72	63	15	121

A descarga libre con el ventilador montado en su voluta.
 Free blowing with fan mounted in scroll.

Tipo / Type	N° CURVA N. CURVE	TENSION VOLTAGE V	FRECUENCIA FREQUENCY Hz	CONDENSADOR CAPACITOR µF	POTENCIA INPUT W	INTENSIDAD CURRENT A	CAUDAL AIR VOLUME m³/h	VELOCIDAD SPEED RPM	NIVEL RUIDO NOISE LEVEL dBA	PRESION MINIMA OPERATING FROM Pa	MAX. AMBIENT. TEMPERATURA TEMPERATURE °C	GIRO ROTATION CW/CCW	PESO WEIGHT Kg
RF2C-120/062 K010	1	230	50	2	75	0,35	270	2300	65	0	75	CCW	1,9
			60	2	80	0,36	285	2350	70	0	60		
RF2C-133/042 K010	2	230	50	2	85	0,38	240	2150	65	0	70	CCW	1,8
			60	2	100	0,44	225	2100	65	0	60		
RF2C-133/046 K010	3	230	50	2	90	0,40	245	2100	64	0	70	CCW	1,8
			60	2	105	0,45	230	2075	64	0	60		
RF2C-133/062 K010	4	230	50	2	100	0,47	280	1650	62	0	40	CCW	1,9
			(*)60	2	85	0,37	260	1725	63	0	60		
RF2C-140/059 K172	5	230	50	2	100	0,48	395	1350	58	0	40	CCW	2,3
			60	2	105	0,50	350	1500	57	50	40		

wholesaler