

GENERAL TYPE – **WATER HEATED** AIR CURTAINS
120 mm cross flow fan



KWH - 38



For use in :

- **Small Shops**
- **Bars**
- **Cafeterias**
- **Small Hotels**
- **Banks**
- **Schools**
- **Super markets**



GENERAL TYPE – WATER HEATED AIR CURTAINS

120 mm cross flow fan




Air Curtain KWH – 38 is capable of covering openings of 2.00 m long

Technical Details


		Water Inlet – Outlet Temperature 60 °C – 50 °C	Water Inlet – Outlet Temperature 80 °C – 65 °C
Max Door Height (m)		3.5	
Max Door Width (m)		2.0	
Air Inlet Temperature		20 °C	
Heating Power (kW)	HI	16.0	25.0
	LOW	14.0	22.0
Air Outlet Temperature	HI	35 ⁰ C	42 ⁰ C
	LOW	34 ⁰ C	41 ⁰ C
Pressure Drop Water (ΔP) (Pa)	HI	1980	2000
	LOW	1600	1625
Flow Rate (lt/sec)	HI	0.50	0.40
	LOW	0.40	0.35
Outlet Velocity (m/sec)	HI	9.0	
	LOW	7.5	
Air Volume (m ³ /h)	HI	3515	
	LOW	2930	
Noise level in 1 m dB(A)	HI	65	
	LOW	62	
Motor Power (W)		660	
Capacitor (μF)		12	
Power Supply		230 V , 1 N , 50 Hz	
Capacity (lt)		1.4	
Weight with water (kg)		40.5	
Weight without water (kg)		39	

AIR VELOCITY
DISTRIBUTION
CHART

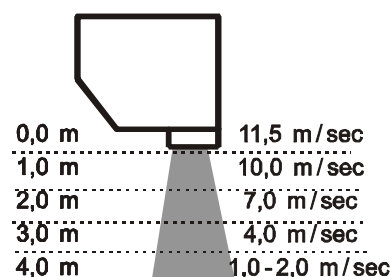

Dimensions

A: Total Length	2053±2 (mm)
B: Total Width	277 (mm)
C: Height	205 (mm)
D: Outlet Length	2003 (mm)
E: Outlet Width (int.)	60 (mm)
K: Outlet width (ext.)	76 (mm)
H: Outlet Height	64 (mm)

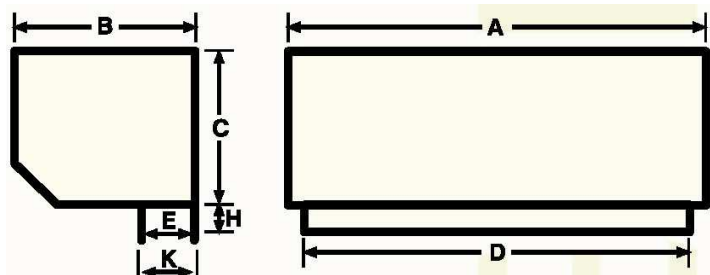

GENERAL TYPE – WATER HEATED AIR CURTAINS
120 mm cross flow fan



OPERATIONAL CHOICES

A) Wired Remote Control Operation

Wall Mounted Wired Remote Control
(from 2.5m up to 6 m cable)
which additionally can be supplied
with an Infrared Remote Control as well



B) Infrared Remote Control Operation

Unit is provided with a build in Panel
(electronic) and an infrared Remote Control.



**Both above described options
can be either delivered :**

- 1). Two speed operation (HI - LOW)
- 2). NL operation :
 - 15 different speeds
 - 1 up to 240 units in parallel connection
 - Master - Slave Operation
 - OLEFINI BMS monitoring

